
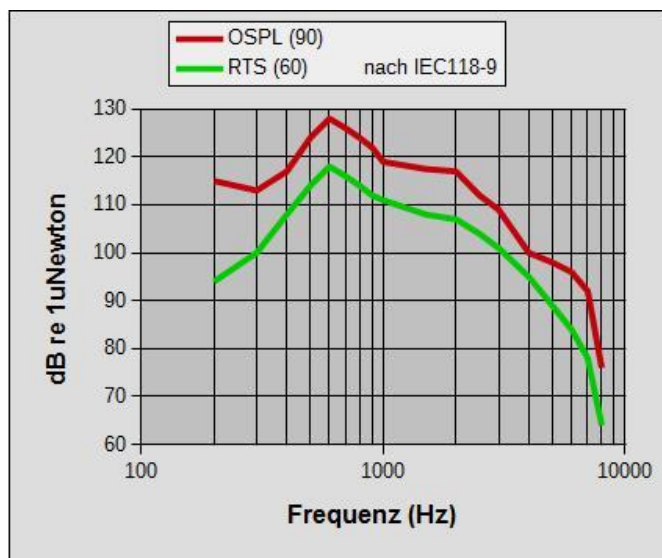


la belle BC 811 Junior Bone Conduction

WDRC	•
Feedback canceler	•
Noise reduction	•
MPO programmable	•
Trimmer TC	•
Volume control	•
Frequenzy bands	12
Frequenzy bands fix	–
Frequenzy.bands variable	•
Channels	8
Programs	4
Program button	•
Programs button tones	•
Low battery tones	•
Data logging	•
Telecoil	o
Microphones	1
Adaptiv directional	–
External microphone	–
Housing color	black
Housing cover color standard	anthracite
Housing cover color option	gold/silver
Position BC conductor	straight
Fitting with conexx cable	•
Fitting software	bruckhoff
NOAH 4.4.0	•
NOAH Link	–
Battery size 312	•
Battery size 13	o
	o = optional

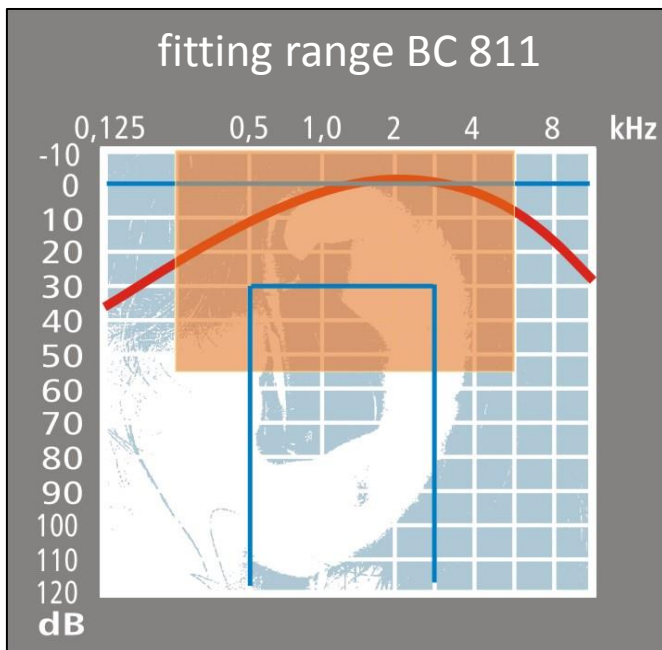

Technical data

		DIN IEC 118-9:1987
Maximum output force level (OFL @90dB)	(dB)	128
Max. acousto-mechanical force level (FOG @60dB)	(dB)	58
Frequency range	(Hz)	250-6000
Operating current	(mA)	1.8
Equivalent input noise	(dB)	29

A	battery flap	E	housing conductor
B	locking screw	F	snap fastener
C	trimmer TC inside		(upper part)
D	volume control	G	program socket
D	program button	M	microphone

