
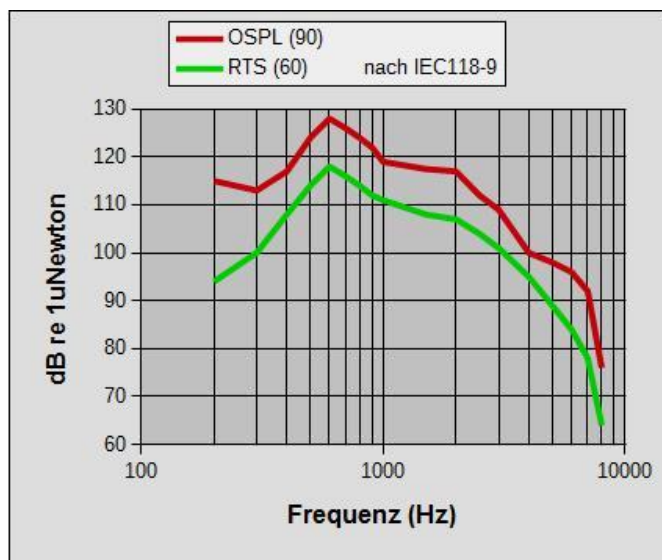


# la belle BC 801 headset Bone Conduction

WDRC	•
Feedback canceler	•
Noise reduction	fix
MPO programmable	–
Trimmer TC	•
Volume control	•
Frequenzy bands	12
Frequenzy bands fix	•
Frequenzy.bands variable	–
Channels	8
Programs	–
Program button	–
Programs button tones	–
Low battery tones	•
Data logging	–
Telecoil	○
Microphones	1
Adaptiv directional	–
External microphone	–
Housing color	black
Housing cover color standard	anthracite
Housing cover color option	gold/silver
Position BC conductor	above or below
Fitting with conexx cable	–
Fitting software	–
NOAH 4.4.0	–
NOAH Link	–
Battery size 312	•
Battery size 13	○
	○ = optional

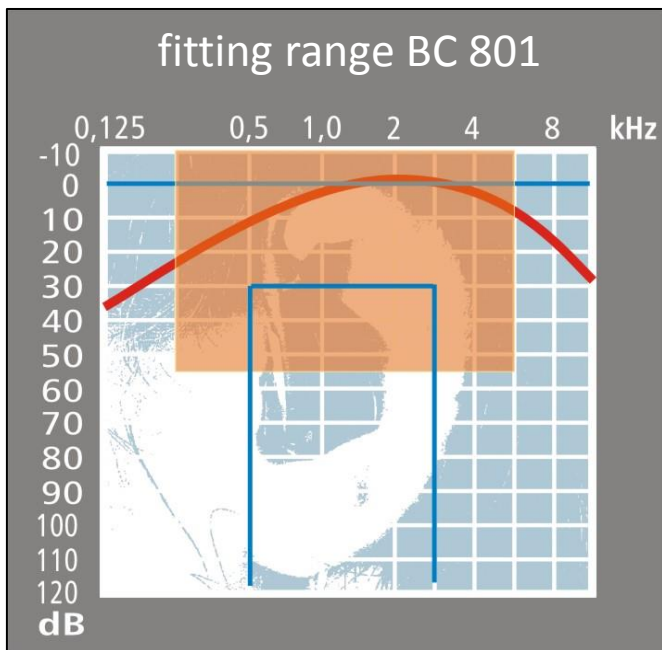

## Technical data

		DIN IEC 118-9:1987
Maximum output force level (OFL @90dB)	(dB)	128
Max. acousto-mechanical force level (FOG @60dB)	(dB)	58
Frequency range	(Hz)	250-6000
Operating current	(mA)	1.8
Equivalent input noise	(dB)	29

A	headset justable	E	program button
B	trimmer TC inside	F	housing conductor
C	volume control	M	microphone
D	battery flap		

