
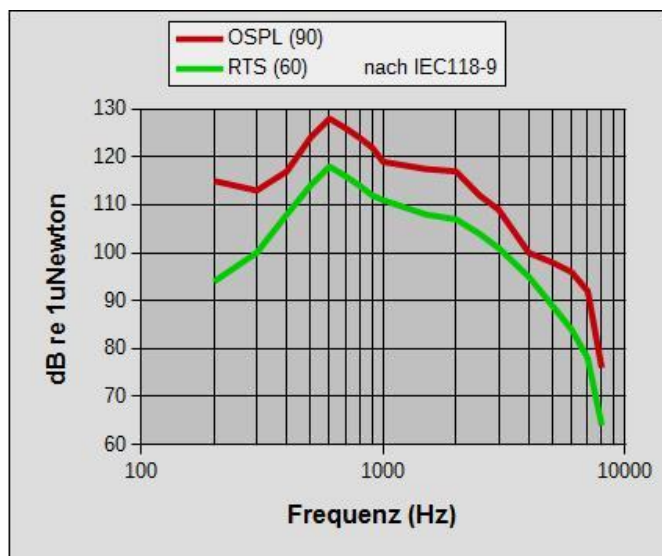


la belle BC 821 Junior Bone Conduction

WDRC	•
Feedback canceler	•
Noise reduction	•
MPO programmable	•
Trimmer TC	•
Volume control	•
Frequenzy bands	12
Frequenzy bands fix	–
Frequenzy.bands variable	•
Channels	8
Programs	4
Program button	•
Programs button tones	•
Low battery tones	•
Data logging	•
Telecoil	○
Microphones	2
Adaptiv directional	•
External microphone	–
Housing color	black
Housing cover color standard	anthracite
Housing cover color option	gold/silver
Position BC conductor	below
Fitting with conexx cable	•
Fitting software	bruckhoff
NOAH 4.4.0	•
NOAH Link	–
Battery size 312	•
Battery size 13	○

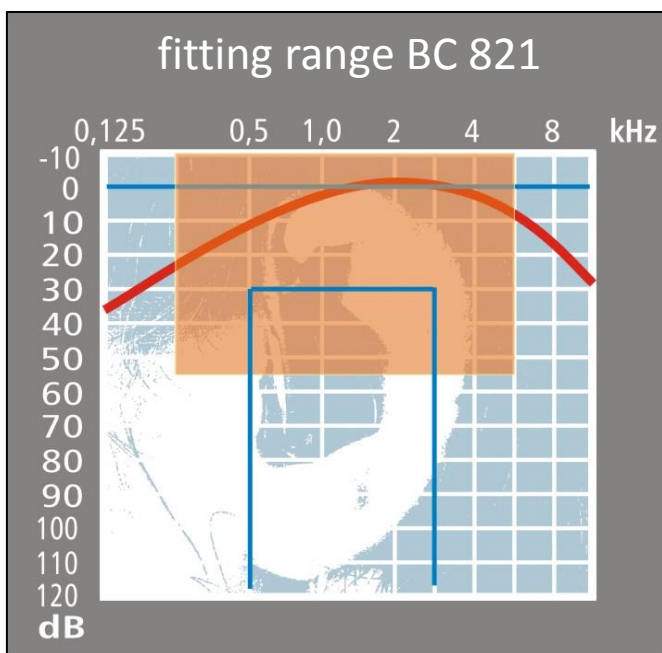

Technical data

		DIN IEC 118-9:1987
Maximum output force level (OFL @90dB)	(dB)	128
Max. acousto-mechanical force level (FOG @60dB)	(dB)	58
Frequency range	(Hz)	250-6000
Operating current	(mA)	1.8
Equivalent input noise	(dB)	29

A	housing cover	G	housing conductor
B	program socket	H	snap fastener
C	volume control		(upper part)
D	locking screw	I	program button
E	trimmer TC inside	M1	front microphone
F	battery flap	M2	rear microphone

