


Technical data

la belle BC D30/50/70

	la belle BC D70	la belle BC D50	la belle BC D30
Channels	16	16	16
Programme	4	4	
In-situ Tone generator	✓	✓	
Fittingsoftware special for BC devices	✓	✓	
Wind Noise Reduction	✓	✓	
Adaptive Feedback Canceling	4. generation	4. generation	
Audio input	✓	✓	
Phonak Roger X Option	✓	✓	
Layered Noise Reduction™	✓	✓	
Telecoil	1	1	
Number of Mikrofonnes	2	1	1
Volume control	✓	✓	✓
Maximum output force level (OFL @90dB)	116 dB	116 dB	116 dB
Max. acousto-mechanical force level @60dB	48 dB	48 dB	48 dB
Frequency range	250 - 6 000 Hz	250 - 6 000 Hz	250 - 6 000 Hz
Operating current	1,6 mA	1,6 mA	1,6 mA
Equivalent input noise	29 dB	29 dB	29 dB
Distortion	< 3%	< 3%	< 3%

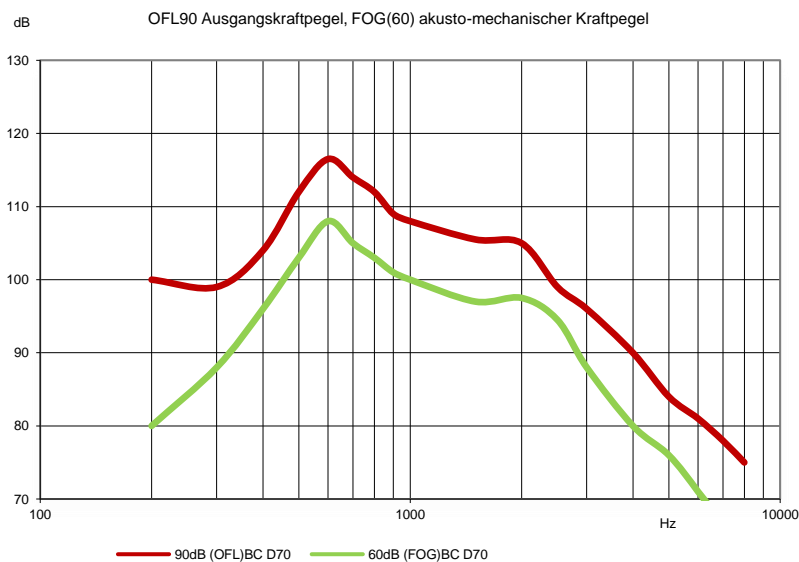

bruckhoff

an Audia Akustik brand

CE
0123